





CD030E / CD0303F- Series

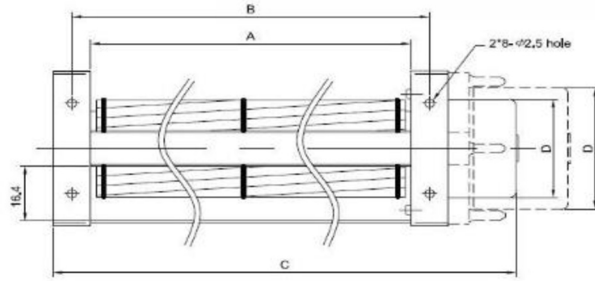


Size	Ø30mm
Housing	Aluminum
Impeller	Aluminum
Motor	CD030E - DC Brushless type CD0303F – DC 3-Phase-Motor
Operating Temp.	0°C~+45°C
Insulation	Class A

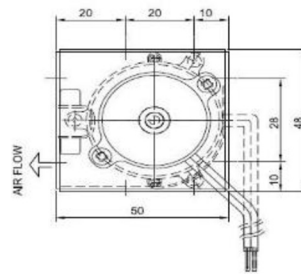

Model Number	Size (mm)			Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmH2O)	Noise dB(A)	Weight (g)
	A	B	C								
CD03009V12BHWE	98	108	134	12	0.15	1.8	3200	21	1.9	29	180
CD03009V24BHWE				24	0.18	4.32					
CD03015V12BHWE	160	170	196	12	0.16	1.92	3100	28	1.7	30	210
CD03015V24BHWE				24	0.15	3.6					
CD03019V12BHWE	198	208	234	12	0.2	2.4	2900	35	1.7	31	230
CD03019V24BHWE				24	0.16	1.92					
CD03029V12BHWE	300	310	336	12	0.22	2.64	2600	45	1.5	33	290
CD03029V24BHWE				24	0.2	4.8					
CD303030V24B3HWF (Double Fan)	630	640	680	24	0.22	5.28	2850	113	1.8	36	580
CD303535V24B3HWF (Double Fan)	730	740	780		0.25	6	2750	137	1.7	35	630
CD304040V24B3HWF (Double Fan)	830	840	880		0.28	6.72	2650	148	1.6	34	690

CD03009/CD03015

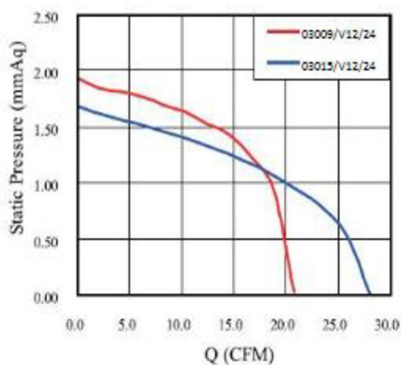

CD03019/CD03024/CD03029

