





CD050E- Series

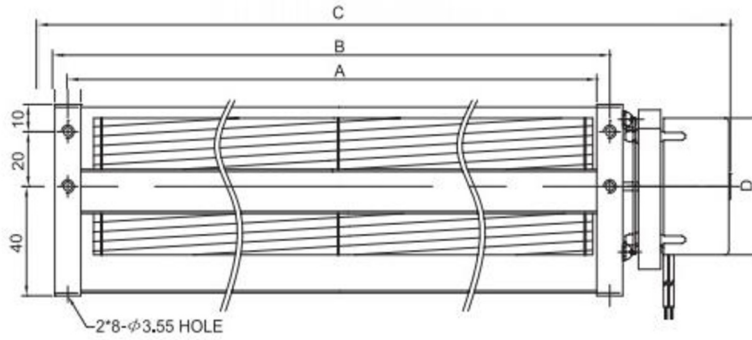


Size	Ø50mm
Housing	Aluminum
Impeller	Aluminum
Motor	DC Brushless type
Operating Temp.	0°C ~ +45°C
Insulation	Class A

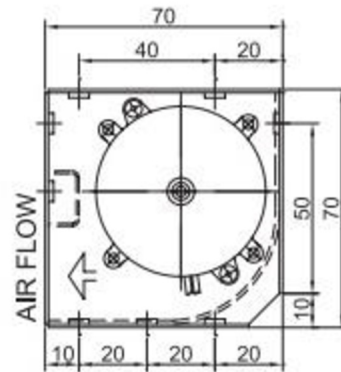

Model Number	Size (mm)			Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmH2O)	Noise (dB(A))	Weight (g)
	A	B	C								
CD05009V12_HWE	98	108	155	12	0.30	3.6	2800	32	3.3	36	330
CD05009V24_HWE				24	0.18	4.32					
CD05019V12_HWE	198	208	255	12	0.47	5.64	2000	63	2.6	34	450
CD05019V24_HWE				24	0.24	5.76					
CD05029V12_HWE	298	308	360	12	0.65	7.8	2400	124	4.0	43	700
CD05029V24_HWE				24	0.40	9.6					
CD05035V12_HWE	358	368	420	12	0.75	9.0	2300	131	3.6	42	7700
CD05035V24_HWE				24	0.45	10.8					

_ for B / S = Ball Bearing / Sleeve Bearing

CD05009/05019

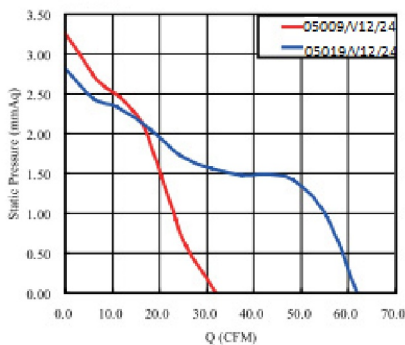

CD05029/05035

